

DIGITAL MULTIMETER



CAT III
600V

CAT II
1000V



DT152A

SPECIFICATIONS

DC voltage	40m-400m-4-40-600V	±0.5%
AC voltage	40m-400m-4-40-600V	±1.0%
DC current	400μ-4000μ-40m-400m-10A	±1.8%
AC current	400μ-4000μ-40m-400m-10A	±2.0%
Resistance	400-4K-40K-400K-4M-40MΩ	±1.0%
Frequency	10Hz~10MHz	±3.0%
Temperature	-20°C~1000°C/-4°F~1832°F	±2.0%
Capacitance	40n-400n-4μ-40μ-400μ-40mF	±5.0%

FEATURES

Low battery indication	✓
Overload protection	✓
Diode test	✓
Continuity buzzer test	✓
Temperature	✓
Auto range	✓
Diode test	✓
Data hold	✓
NCV	✓
Data hold	✓
Backlight	✓

CHARACTERISTICS

Power supply	one 9V 6F22 battery
Product size	186×87×50mm
Product net weight	About 310g (with batteries)

DIGITAL MULTIMETER



■ **DT153A**



■ **DT153B**



■ **DT153C**



CAT III
600V

CAT II
1000V



SPECIFICATIONS

DC voltage	600m-6-60-600-1000V	±0.5%
AC voltage	6-60-600-750V	±1.0%
DC current	60μ-60m-600m-6-10A	±1.8%
AC current	60m-600m-6-10A	±1.8%
Resistance	600-6k-60k-600k-6M-60MΩ	±1.0%
Frequency	10Hz~10MHz	±5.0%
Temperature	-40~1000°C/ -40~1832°F	±2.0%
Capacitance	60n-600n-60u-600u-6m-60mF	±5.0%
Duty Cycle	0.1%-99.9%	±1.0%

FEATURES

Low battery indication	√
Overload protection	√
Diode test	√
Continuity buzzer test	√
Temperature	√
Battery test	√
Data hold	√
Backlight	√
NCV	√
N/L judgment	√
Electric torch	√

CHARACTERISTICS

Power supply	1.5V batteries (AAA) X 2
Product size	186×87×50mm
Product net weight	About 310g (with batteries)

FUNCTION

[illegible]

DIGITAL MULTIMETER



CAT III
600V

CAT II
1000V



DT155A

SPECIFICATIONS

DC voltage	600m-6-60-600-1000V	±0.8%
AC voltage	6-60-600-750V	±1.2%
DC current	6m-60m-600m-20A	±1.8%
AC current	60m-20A	±1.8%
Resistance	600-6k-60k-600k-6M-60MΩ	±1.0%
Frequency	10Hz~10MHz	±5.0%
Temperature	-40~1000°C/ -40~1832°F	±2.5%
Capacitance	6n-60mF	±8.0%
Duty Cycle	10%-95%	±2.0%

FEATURES

Low Voltage Symbol Display	√
Overload protection	√
Continuity Measurement and Buzzer Functiont	√
Transistor Test	√
Temperature	√
Auto power-off	√
Backlight	√
NCV	√
N/L judgment	√
Power Frequency Test	√

CHARACTERISTICS

Power supply	2 x 1.5V AAA batteries
Product size	186x87x50mm
Product net weight	About 310g (with batteries)

[illegible]

DIGITAL CLAMP MULTIMETER

CE CAT III
600V



■ DT212



SPECIFICATIONS

DC voltage	0.5~600V	±1.0%
AC voltage	0.5~600V	±1.2%
AC current	0.3~600A	±2.0%
Resistance	0.1~60MΩ	±4.0%
Frequency	10Hz~10KHz	±1.0%
Capacitance	10n~60mF	±3.0%

FEATURES

Auto ranging	√
Low-Voltage Display	√
Overload protection	√
Diode test	√
Continuity buzzer test	√
True-RMS	√
NCV	√
Back light	√
Electric torch	√

CHARACTERISTICS

Power supply	1.5V batteries (AAA) X 2
Product size	203×68×33mm
Product net weight	about 193g(with batteries)

DIGITAL LC METER



CAT III
300V

CAT II
600V



■ DM6243B

SPECIFICATIONS

Capacitance	2n-200n-2μ-20μ-200μ-2000μF	±0.5%
Inductance	2m-20m-200m-2-20H	±2.0%

CHARACTERISTICS

Power supply	1.5V AAAx3PCS
Product size	145x73x34mm
Product net weight	Around 185g



■ CM7115B




SPECIFICATIONS

Capacitance	200p-2000p-20n-200n-2μ--20μ-20μ-2000μ-20MF	±2.0%
-------------	--	-------

CHARACTERISTICS

Power supply	AAA 1.5V battery X 3
Product size	145x73x34mm
Product net weight	Around 185g

BATTERY TESTER

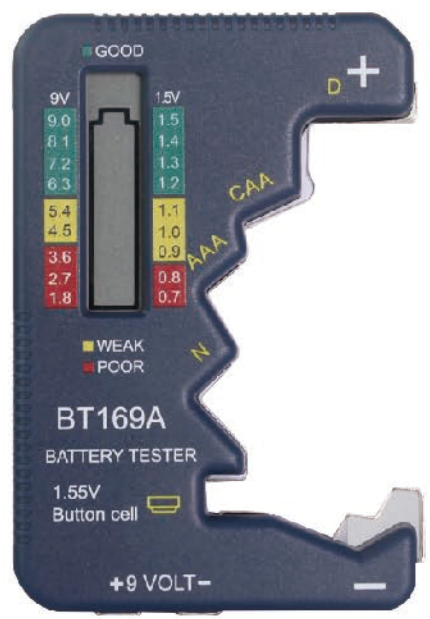

■ BT169A

Measurable battery types	
measure the battery model	C/AA/AAA/D/N/9V 6F22/1.55V
LCD display	Directly display the battery voltage under test.

CHARACTERISTICS	
Product size	92.5x63.5x14.5mm
Product net weight	about 31g



■ BT169D



VOLTAGE TESTER



■ VD10

SPECIFICATIONS

AC voltage range	12-300V
------------------	---------

FEATURES

NCV test	✓
Live wire judgement	✓
Continuity test	✓
Break point find	✓
Electric Torch	✓

CHARACTERISTICS

Power supply	1.5V batteries (AAA) X 2
Product size	150x24.5x26.5mm
Product net weight	about 43g (without battery)

PEN TYPE MULTIMETER



■ PDM40

SPECIFICATIONS

DC voltage	400m-4-40-400-600V	±0.8%
AC voltage	4-40-400-600V	±1.0%
DC current	4m-400mA	±2.0%
AC current	4m-400mA	±2.5%
Resistance	400-4k-40k-400k-4M-4MΩ-40MΩ	±1.0%
capacitance	4n-4mF	±4.0%

FEATURES

Low battery indication	√
Overload protection	√
Diode test	√
Continuity buzzer test	√
Data hold	√
Backlight	√
NCV	√
Electric torch	√

CHARACTERISTICS

Power supply	two 1.5V AAA battery
Product size	205X49X34mm
Product net weight	about 84g (without battery)

CIRCUIT TESTER



■ ST02(front side)



■ ST02(back side)

INDICATOR	FAULT	REASON FOR WIRING FAULT
○ ● ○	Open ground	Ground contact not connected
○ ○ ●	Open neutral	Neutral contact not connected
○ ○ ○	Open hot	Hot contact not connected
● ○ ●	Hotground reverse	Hot and ground contacts interchanged
● ● ○	Hotneutral reverse	Hot and neutral contacts interchanged
○ ● ●	Correct	Receptacle is wired correctly

CHARACTERISTICS

Product size	117×55×24mm
Product net weight	about 34.5g